

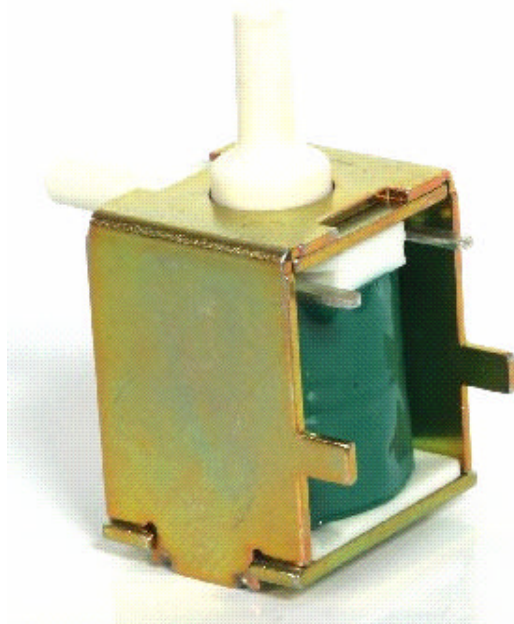


Solenoid Valve

GV0624

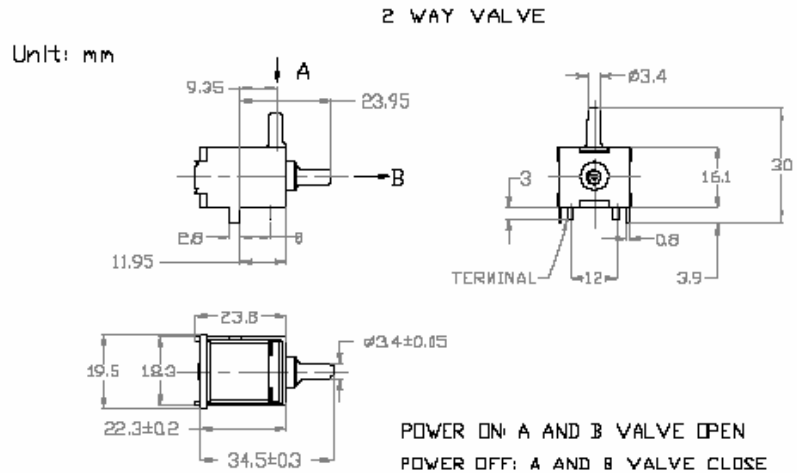

- Air valve
- 2 or 3 way
- Flying leads with optional connectors
- Optional PCB mounting
- Customised fixing holes
- Optional voltage ratings
- 2 way Orifice Ø 0.75mm
- 3 way Orifice Ø 0.9 mm

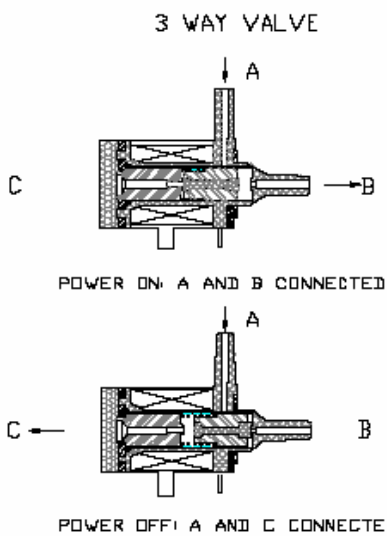

STANDARD SPECIFICATION

Total weight : 28g
Plunger weight : 2g

1	RATED POWER CONSUMPTION	2.2W @20°C	8	COIL SPECIFICATIONS		
				VOLTAGE(VDC)	RESISTANCE (Ω)	CURRENT (mA)
2	FLUID TO USE	AIR		6	16.36	366
3	INSULATION GRADE	CLASS A(105°C)		12	65.6	183
4	INTERNAL LEAKAGE	5PSI MAX(-5PSI)		24	260	92
5	STROKE	0.4MM				
6	NORMALLY	2 OR 3 WAY VALVE				
7	ORIFICE INSIDE DIAMETER	B Ø0.75MM C Ø0.9MM				