



#### TWO STAGE SERVOVALVES

#### **78 SERIES SERVOVALVES**

The 78 Series flow control servovalves are throttle valves for 3- and preferably 4-way applications. They are a high performance, two-stage design that covers the range of rated flows from 20 to 40 gpm at 1000 psi valve drop. The output stage is a closed center, fourway sliding spool. The pilot stage is a symmetrical doublenozzle and flapper, driven by a double air gap, dry torque motor. Mechanical feedback of spool position is provided by a

cantilever spring. The valve design is simple and rugged for dependable, long life operation.

These valves are suitable for electrohydraulic position, speed, pressure or force control systems with high dynamic response requirements.

# Principle of operation

An electrical command signal (flow rate set point) is applied to the torque motor coils, and creates a magnetic force which acts on the ends of the pilot stage armature. This causes a

deflection of armature/flapper assembly within the flexure tube. Deflection of the flapper restricts fluid flow through one nozzle, which is carried through to one spool end, displacing the spool.

Movement of the spool opens the supply pressure port (P) to one control port, while simultaneously opening the tank port (T) to the other control port. The spool motion also applies a force to the cantilever spring, creating a restoring torque on the armature/flapper

assembly. Once the restoring torque becomes equal to the torque from the magnetic forces, the armature/flapper assembly moves back to the neutral position, and the spool is held open in a state of equilibrium until the command signal changes to a new level.

In summary, the spool position is proportional to the input current and with constant pressure drop across the valve, flow to the load is proportional to the spool position.

#### **VALVE FEATURES**

- > 2-stage design with dry torque motor
- > Low friction double nozzle pilot stage
- ➤ High spool control forces
- ➤ High dynamics

- > Rugged, long-life design
- > High resolution, low hysteresis
- > Completely set-up at the factory
- > Intrinsically safe or flameproof valve versions are available

The actual flow is dependent upon electrical command signal and valve pressure drop. The flow for a given valve pressure drop can be calculated using the square root function for sharp edge orifices:

$$Q = Q_{N} \sqrt{\frac{\Delta p}{\Delta p_{N}}}$$


Q [gpm] = calculated flow

 $Q_N$  [gpm] = rated flow

 $\Delta p$  [psi] = actual valve pressure drop

 $\Delta p_N$  [psi] = rated valve pressure drop













# **78 SERIES**

#### **GENERAL TECHNICAL DATA**

Operating Pressure

ports P,T, A and B up to 3,000 psi

**Temperature Range** 

Fluid -40°F to 275°F Ambient -40°F to 275°F

Seal Material Viton, others on request
Operating Fluid Compatible with common hydraulic fluids, other fluids

on request.

Recommended viscosity 60-450 SUS @  $100^{\circ}F$  **System Filtration:** High pressure filter (without bypass, but with dirt alarm) mounted in the main flow and, if possible, directly upstream of the valve.

**Class of Cleanliness:** The cleanliness of the hydraulic fluid greatly effects the performance (spool positioning, high resolution) and wear (metering edges, pressure gain, leakage) of the servovalve.

# **Recommended Cleanliness Class**

For normal operation ISO 4406 < 14/11 For longer life ISO 4406 < 13/10

Filter Rating recommended


 $\begin{array}{ll} \text{For normal operation} & \beta_{10} \geq 75 \; (10 \; \mu\text{m absolute}) \\ \text{For longer life} & \beta_{5} \geq 75 \; (5 \; \mu\text{m absolute}) \\ \textbf{Installation Operations} & \text{Any position, fixed or movable.} \end{array}$ 

 Vibration
 30 g, 3 axes

 Weight
 6.3 lbs (2.9 kg)


Shipping Plate Delivered with an oil sealed

shipping plate.

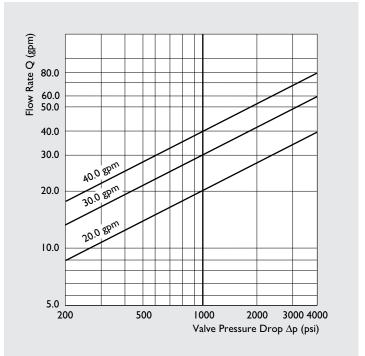

#### Valve Flow Diagram

Valve flow for maximum valve opening (100% command signal) as a function of the valve pressure drop.

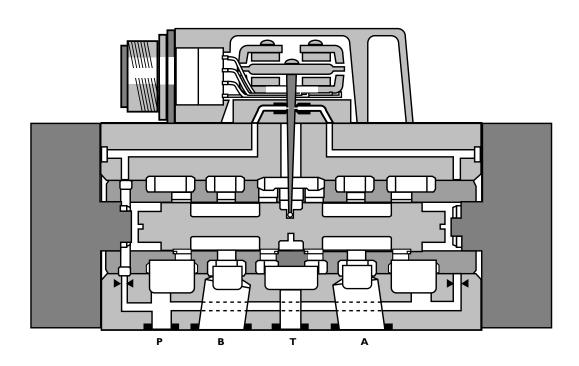


# **TECHNICAL DATA**


ModelType			78			
Valve Body Version			4-way			
			2-stage with	spool–bushin	ng assembly	
Pilot Stage			Nozzl	Nozzle/Flapper, Highflow		
<b>Pilot Connection</b>			Internal only			
Rated Flow	$(\pm 10\%)$ at $\Delta p_N = 1,00$					
	Standard	[gpm]	20.0	30.0	40.0	
	High Response	[gpm]	20.0	30.0	40.0	
Response Time*	Standard	[ms]	30.0	30.0	40.0	
	High Response	[ms]	15.0	20.0	N/A	
Threshold*		[%]		< 0.5%		
Hysteresis*		[%]		< 3.0%		
Null Shift	at $\Delta T = 100^{\circ}F$	[%]		< 2.0%		
Null Leakage Flow*	max.	[gpm]		0.65 to 0.92		

<sup>\*</sup> Measured at 1,000 psi pilot or operating pressure

# **Step Response**






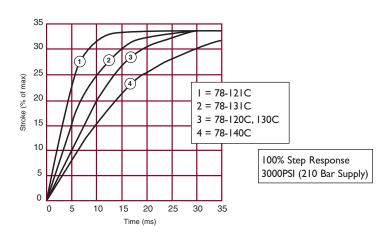


Full Amplitude Step Response


**Typical characteristic curves** with ±40% and ±100% input signal, measured at 3,000 operating pressure.


### **Standard Valves**







# **High Response Valves**





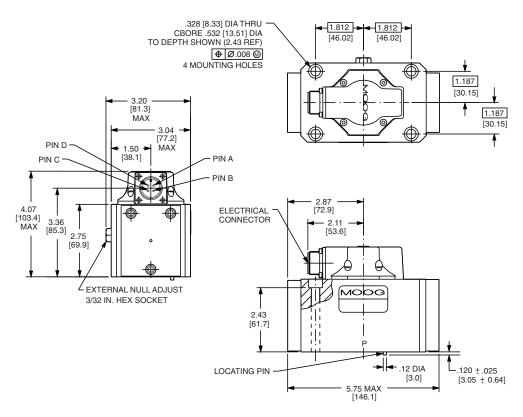

# TYPICAL SUBPLATE MANIFOLD

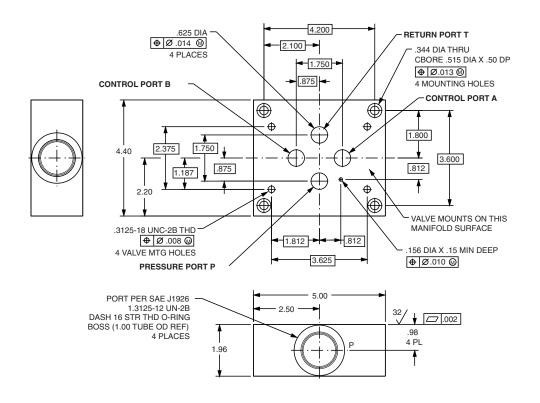

**Null Adjust:** Flow out of Control Port A will increase with clockwise rotation of null adjust screw (3/32 hex key).

Surface to which valve is mounted requires a  $^{32}$  [ $\Delta\Delta$ ] finish, flat within 0.002[0.05] TIR.

#### **78 SERIES**

# **ELECTRICAL CONNECTIONS**

# Rated current and coil resistance

A variety of coils are available for 78 Series Servovalves, which offer a wide choice of rated current. See Table 1.


#### **Coil connections**

A four-pin electrical connector (that mates with an MS3106F14S/2S) is standard. All four torque motor leads are available at the connector so external connections can be made for series, parallel or differential operation.

78 Series Servovalves can be supplied on special order with other connectors or a pigtail.

#### Servoamplifier

The servovalve responds to input current, so a servoamplifier that has high internal impedance (as obtained with current feedback) should be used. This will reduce the effects of coil inductance and will minimize changes due to coil resistance variations.

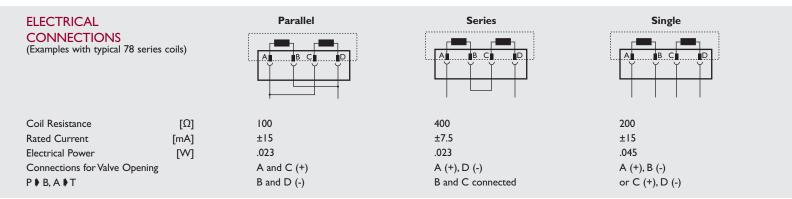

Note: Before applying electrical signals, the pilot stage has to be pressurized.


#### TABLE I

Nominal Recommended Rated Current-mA		Approximate Coil Inductance*-Henrys			
Per Coil at 77°F (25°C) Ω	Parallel, Differential or Single Coil Operation	Series Coils	Single Coils	Series Coils	Parallel Coils
80	±40	±20	0.12	0.36	0.10
200	±15	±7.5	0.72	2.20	0.59
1000	±8	±4	3.20	9.70	2.60

<sup>\*</sup> Measured at 50 Hz

# **78 SERIES**

# ORDERING INFORMATION SPARE PARTS AND ACCESSORIES

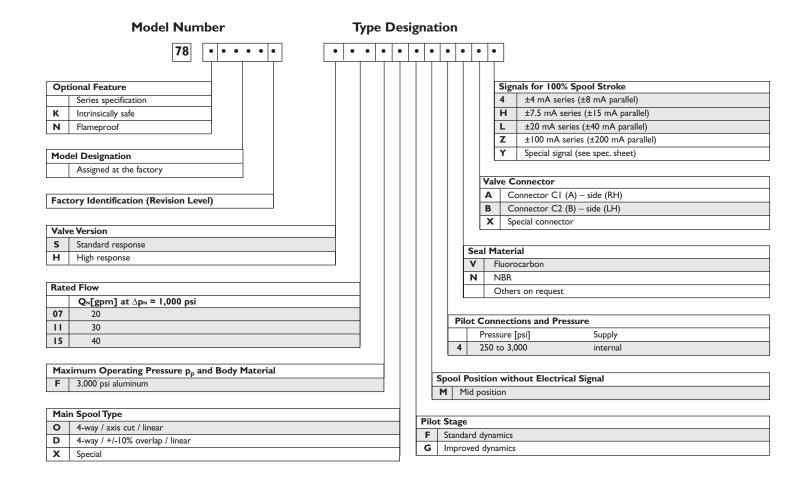


Preferred configurations highlighted. All combinations may not be available. Options may increase price and delivery. Technical changes are reserved.

### SPARE PARTS AND ACCESSORIES

O-Rings (included in delivery), for P.T.A and B	FPM 85 Shore ID 0.739 x .070	Moog P/N 42082-021
Mating Connector, waterproof IP 65 (not included in delivery)	49054F14S2S (MS3106F14S-2S)	
Flushing Block Kit	A37333-IKI	
Mounting Bolts (not included in delivery)		
5/16 - 18 NC x 3.0 long (4 pieces)	A31324-248B	
Replaceable Filter	14417-1	
Filter Replacement Kit	B52555RK52K1	



Australia Mulgrave Brazil São Paulo China Shanghai Denmark Cöpenhagen England Tewkesbury Finland Espoo France Rungis Germany Böblingen

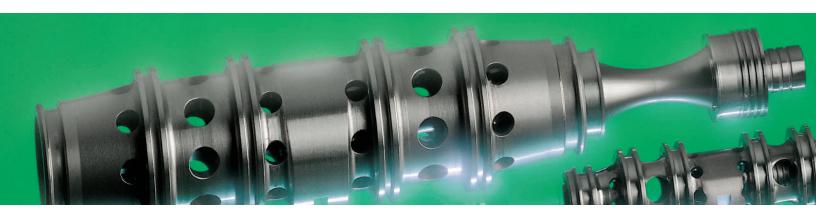

Hong Kong Hong Kong India Bangalore Ireland Ringaskiddy Malnate Italy Hiratsuka Japan Korea Seoul Philippines Baguio Singapore Singapore Spain Orio Sweden Askim East Aurora USA

# MOOG Industrial Controls Division

Moog Inc., East Aurora, NY 14052-0018
Telephone: +1-716-652-2000
Fax: +1-716-687-7910
Toll Free: +1-800-272-MOOG
www.moog.com/industrial
©2007 Moog Inc. All changes are reserved.